

NEW

M140X1

Item		M140X1	
CNC Unit	CNC Unit	CNC-C00	
	X axis	mm (inch)	200 (7.9)
	Y axis	mm (inch)	440 (17.3)
	Z axis	mm (inch)	305 (12.0)
	A axis	(deg.)	5 ~ -95
Travels	C axis	(deg.)	360
	Work area size	mm (inch)	D140 (D5.5)
	Shape of table top	In compliance with table nose No.5 of ISO702-4 (JISB6109-2)	
	Max. loading capacity (uniform load)	kg (lbs)	40 (88.2)
	Maximum table load inertia	kg·m ² (lb·inch ²)	0.32 (1093)
Table	Spindle speed	min ⁻¹	10~10,000
	Speed during tapping	min ⁻¹	MAX. 6,000
	Tapered hole	7/24 tapered No.30	
	Coolant Through Spindle (CTS)	Optional	
	Max. spindle speed	min ⁻¹	2,000
Turning spindle	Rapid traverse rate (XYZ-area)	m/min (inch/min)	50 × 50 × 50 (1,969 × 1,969 × 1,969)
	Cutting feed rate	mm/min (inch/min)	X,Y axis : 1 ~ 10,000 (0.04 ~ 394) Z axis : 1 ~ 20,000 (0.04 ~ 787)
	Indexing feedrate (A and C)	min ⁻¹	A axis 60 C axis 200
	Tool shank type	MAS-BT30	
	Pull stud type *4	MAS-P30T-2	
Feed rate	Tool storage capacity	pcs.	22
	Max. tool length	mm (inch)	200 (7.9)
	Max. tool diameter	mm (inch)	80 (3.1)
	Max. tool weight *1	kg (lbs)	3 (6.6)
	Tool selection method	Random shortcut method	
ATC unit	Tool To Tool	sec.	0.9
	Chip To Chip	sec.	1.4
	Main spindle motor (10min/continuous)*2	kW	10.1 / 6.7
	Axis feed motor	kW	X,Y axis 1.0 Z axis 1.8 A axis 1.8
	Turning spindle motor	kW	4.2
Tool change time *5	Power supply	AC V±10%, 50/60Hz±1Hz	
	Power capacity (continuous)	kVA	9.5
	Air supply Regular air pressure	MPa	0.4~0.6 (recommended value : 0.5MPa) *6
	Required flow	L/min	130
	Height	mm (inch)	2513 (98.9)
Electric motor	Required floor space	mm (inch)	1,280 × 3,641 (50.4 × 144.7) [including chip conveyor]
	Weight	kg (lbs)	2,370 (5,226)
	Accuracy *3	mm (inch)	0.006~0.020 (0.00024~0.00079) [X,Y,Z] 28 sec or less [A,C]
	Repeatability of bidirectional axis positioning (ISO230-2:2006)	mm (inch)	Less than 0.004 (0.00016) [X,Y,Z] 16 sec or less [A,C]
	Standard accessories	Instruction Manual (1 set), anchor bolts (4 pcs.), leveling bolts (4 pcs.)	

*1. Actual tool weight differs depending on the configuration and center of gravity. The figures shown here are for reference only.
*2. Spindle motor output differs depending on the spindle speed.
*3. Measured in compliance with ISO standards and Brother standards.
*4. Brother specifications apply to the pull studs for CTS.
*5. Measured in compliance with JIS B6336-9 and MAS011-1987.
*6. Regular air pressure varies depending on the machine specifications, machining program details, or use of peripheral equipment. Set the pressure higher than the recommended value.

NC unit specifications	
CNC model	CNC-C00
Control axes	5 axes (X,Y,Z,A,C)
Simultaneously controlled axes	Positioning 5 axes (X,Y,Z,A,C)
	Interpolation Linear: 4 axes (X,Y,Z,C) Circular: 2 axes Helical/conical: 3 axes (X,Y,Z)
Least input increment	0.001mm, 0.0001inch, 0.001 deg.
Max. programmable dimension	±9999.999mm, ±999.9999inch
Display	12.1-inch color LCD
Memory capacity	Approx. 100 Mbytes (Total capacity of program and data bank)
External communication	USB memory interface, Ethernet, RS232C 1ch
No. of registrable programs	4,000 (Total capacity of program and data bank)
Program format	NC language * Conversion language not available.
*When program size is bigger than 2 Mbytes, machine works with extended memory operation. *Ethernet is a trademark or registered trademark of XEROX in the United States.	

Standard NC functions			
● Absolute / incremental	● Machine lock	● Servomotor off standby mode (energy saving function)	● Program compensation
● Inch / metric	● Computer remote	● Chip shower off delay	● Tool length compensation
● Corner C / Corner R	● Built-in PLC	● Automatic coolant off (energy saving function)	● Cutter compensation
● Rotational transformation	● Motor insulation resistance measurement	● Automatic work light off (energy saving function)	● Macro function
● Synchronized tap	● Operation log	● Heat expansion compensation system (X,Y,Z axes)	● Local coordinate system
● Coordinate system setting	● High accuracy mode AIII	● Tap return function	● One-way positioning
● Dry run	● Tool length measurement	● Automatic workpiece measurement *1	● Operation in tape mode
● Restart	● Tool life management / spare tool	● Waveform display	● (Turning function)
● Backlash compensation	● Background editing	● Operation level	● Constant peripheral speed control
● Pitch error compensation	● Graphic display	● External input signal key	● Feed per revolution control
● Rapid traverse override	● Subprogram	● Expanded workpiece coordinate system	● Tool position compensation XYZ
● Cutting feed override	● Helical / conical interpolation	● Scaling	● Nose R compensation
● Alarm history (1,000 pieces)	● Tool washing filter with filter clogging detection	● Mirror image	
● Start-up log	● Automatic power off (energy saving function)	● Menu programming	

Optional NC functions	
● Memory expansion (Approx. 500 Mbytes)	● Spindle override
● High accuracy mode BII (look-ahead 200 blocks, smooth path offset)	● Interrupt type macro
*1 Measuring instrument needs to be prepared by users.	

Global Service Sites

Local dealers are available to provide services in each region, in addition to the sites below.

U. S. A.
BROTHER INTERNATIONAL CORP.
MACHINE TOOLS DIV. TECHNICAL CENTER
2200 North Stonington Avenue, Suite 270, Hoffman Estates, IL 60169, U.S.A.
PHONE: (1)224-653-8415 FAX: (1)224-653-8821

India
BROTHER INTERNATIONAL (INDIA) PVT LTD.
BANGALORE TECHNICAL CENTER
Park Landing, Ground Floor, Municipal No.5AC-709, 2nd Block, HRBR Extension, Bangalore - 560 043 Karnataka, India
PHONE: (91)80-6405-7999

Specifications may be subject to change without any notice.

Germany
BROTHER INTERNATIONALE INDUSTRIEMASCHINEN GmbH
MACHINE TOOLS DIVISION FRANKFURT TECHNICAL CENTER
Hoechster Str.94, 65835 Liederbach, Germany
PHONE: (49)69-977-6708-0 FAX: (49)69-977-6708-80

China
BROTHER MACHINERY (SHANGHAI) LTD.
(MACHINE TOOLS DIV.) SHANGHAI TECHNICAL CENTER
3F, Haiyi Commercial bldg. No.310 TianShan Road, ChangNing District, Shanghai 200336, China
PHONE: (86)21-3251-9837 FAX: (86)21-3251-9839

Thailand
BROTHER COMMERCIAL THAILAND LTD.
MACHINE TOOLS TECHNICAL CENTER
1232 Rama 9 Road, Suanluang Sub-District, Suanluang District, Bangkok 10250, Thailand
PHONE: (66)2-374-6447 FAX: (66)2-374-2706

China
BROTHER MACHINERY (SHANGHAI) LTD.
DONGGUAN BRANCH (MACHINE TOOLS DIV.)
DONGGUAN TECHNICAL CENTER
1F, No.45 North Road Lianfeng, Xianxi Village, Chang'an Town, Dongguan, Guangdong Province, China
PHONE: (86)769-2238-1505 FAX: (86)769-2238-1506

Figures in brackets () are the country codes.




BROTHER INDUSTRIES, LTD.
MACHINERY & SOLUTION COMPANY


1-5, Kitajizoyama, Noda-cho, Kariya-shi,
Aichi-ken 448-0803, Japan
PHONE: 81-566-95-0075
FAX : 81-566-25-3721

<http://www.brother.com>



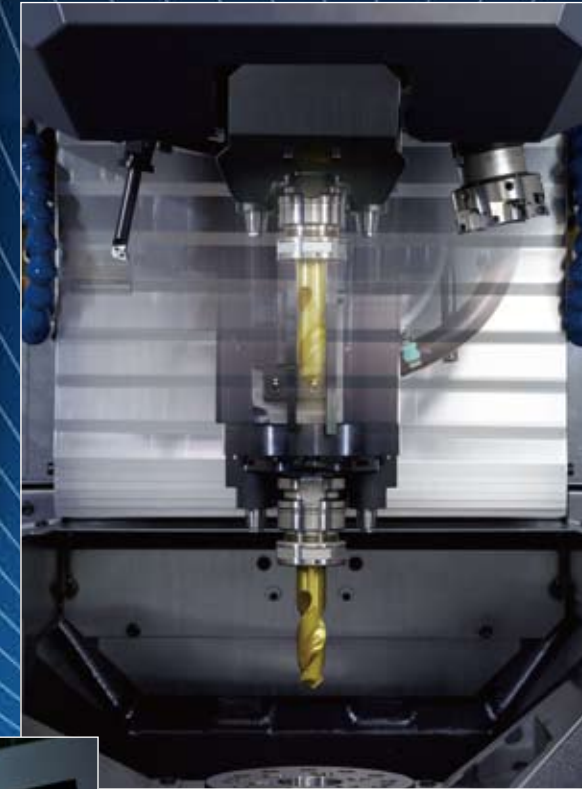

New Choice for Process Integration

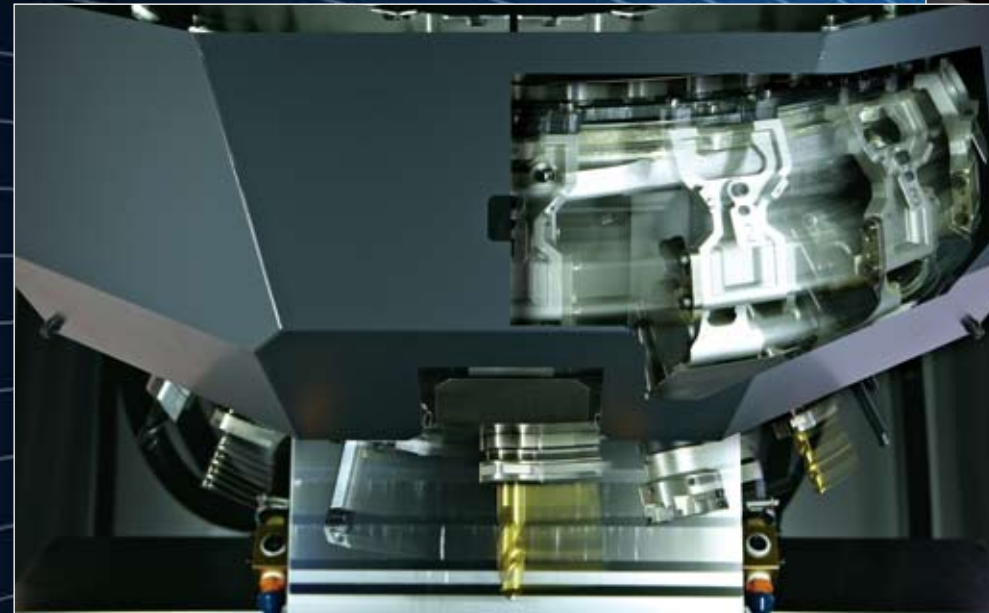

“Desire to attain more efficient production”

This strong request from production sites has taken shape.

“Enabling one machine to perform both turning and milling”

Based on the process integration concept,

a multi-tasking machine has been developed to strengthen production sites.

SPEEDIO™ M140X1

Basic specifications

Max. spindle speed (min ⁻¹)	10,000
Max. turning spindle speed (min ⁻¹)	2,000
Travel amount (X Y Z) (mm)	X 200 Y 440 Z 305
Travel amount (A C)(deg.)	A 5 ~ -95 C 360
Tool storage capacity (pcs.)	22
Rapid traverse rate (X Y Z area)(m/min)	X 50 Y 50 Z 50
Indexing feedrate (A C) (min ⁻¹)	A 60 C 200
Required floor space (mm)	1,280 × 3,641
Coolant Through Spindle (CTS)	Option

Newly developed ATC magazine



High-speed tool change is possible due to the ATC magazine being mounted around the column. Up to 22 tools can be stored.

Double plunger lock




A double plunger lock is used to secure the turning tool to the tool spindle, achieving stable machining.

Process integration in one machine

Workpieces previously machined using a turning center and a machining center can now be machined on one machine with machining processes integrated. This reduces handling time between machines.


● **Turning center + Machining center**

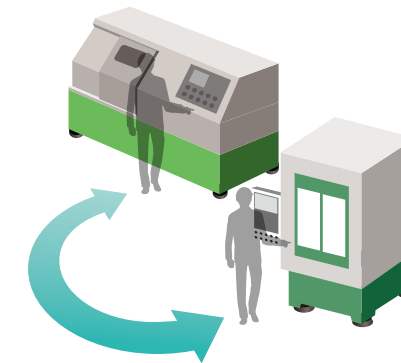

● **M140X1**




● **Turning center + Machining center**

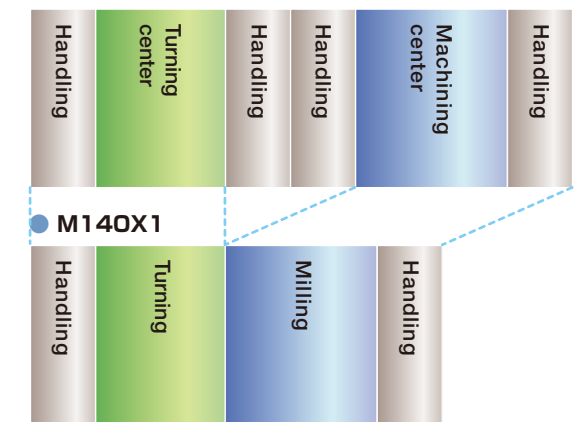

■ **Example of process integration**

Turning and multi-face machining can be done by one unit of M140X1 (Automotive parts)

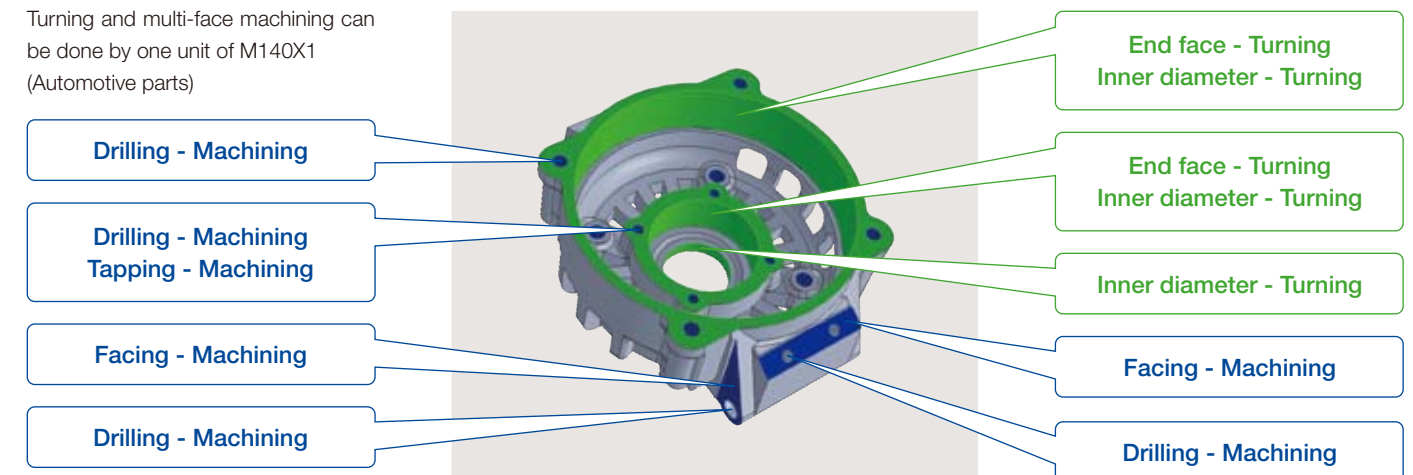

Advantages

Integration of the turning process and milling process brings various advantages, and contributes to high-efficiency machining expected by customers.

Reduction of handling time

As turning and milling can be performed on one machine, there is no setup change between machines.

High accuracy through one-time chucking


As multiple processes can be performed through one-time chucking, workpiece attachment errors are eliminated, improving machining accuracy.

Improving line balance

Machining processes can be divided more flexibly, improving the line balance.

High-efficiency machining

High-performance built-in DD motor

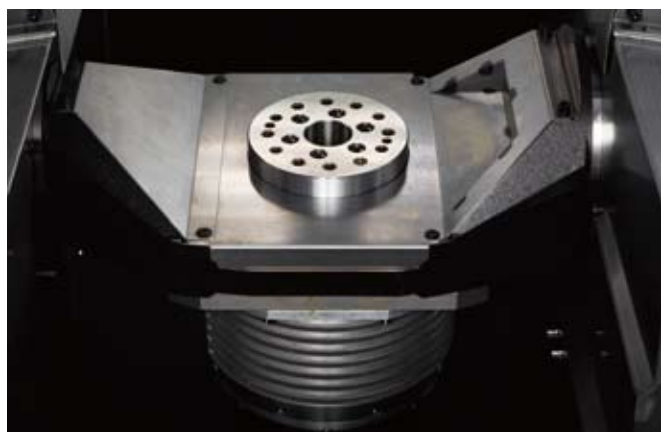

The newly developed high-speed and high-output built-in DD motor produces more efficient turning. The maximum speed is 2,000 min⁻¹.

Roller cam index unit



A roller drive mechanism is used for the tilt axis (A-axis). As the index unit is clampless, high-speed and highly accurate indexing is possible.

Fast acceleration/deceleration spindle



Using a fast acceleration/ deceleration spindle motor and highly-responsive servo control achieves quicker starting and stopping of the spindle.

Start / stop time :
0.2s


Simultaneous operation



Wasted time is further reduced by positioning the X/Y/Z axes and A/C axes simultaneously with tool changes.

Reduction in
non-cutting time


High-speed tool change (nonstop ATC)



High-speed tool change achieved by optimal control for spindle start/stop, Z-axis up/down, and magazine operation.

Chip to Chip :
1.4s

High-speed synchronized tapping



Original synchronized tapping control enables high-accuracy tapping at the fastest level in the world.

Peripheral velocity :
377m/min

Milling capabilities

As the spindle torque is high in the medium- and high-speed range, the machine fully demonstrates its capabilities in high-speed, high-efficiency machining for aluminum or steel.

Max. torque : **40Nm** Max. output : **18.9kW**

ADC	
Drill	Tool diameter mm (inch) × Feed mm (inch)/rev
Tap	Tool diameter mm (inch) × Pitch mm (inch)
D 22 × 0.2	M22 × 2.5



* Values measured when the A-axis is at 90 degrees, X-axis is at the stroke center, and Y-axis is at the stroke end.

Turning capabilities

The machine provides excellent turning capabilities due to the high-output turning spindle and the double plunger lock for the turning tool. The time taken for the turning spindle to reach the maximum speed of 2,000 min⁻¹ is 0.3 seconds or less, leading to reduction in machining time.

Max. torque : **55Nm** Max. output : **8.7kW**



Mass production parts requiring turning and milling

Processes can be integrated for mass production parts that are currently machined using a turning center and a machining center. Our machine eliminates any imbalance between the turning cycle and milling cycle, and improves machining accuracy through one-time chucking.



Pursuit of visibility and accessibility

A convex shape is used for the front door to improve accessibility when the door is open.



Door opening width
555mm


The A-axis tilts forward to improve visibility from the front of the machine.



The turning spindle table is at a position where the operator can change workpieces comfortably in a natural posture.

From front opening to table center
490mm

From floor to table
795mm

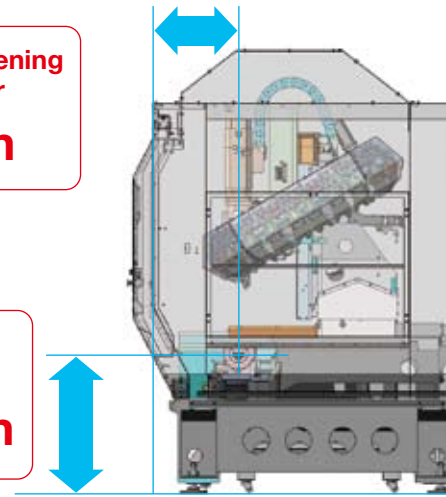

Advanced Usability

The machine is equipped with the new CNC-C00 controller, greatly improving processing capabilities and enhancing functions and usability.

Operability


Equipped with 'shortcut' keys to quickly open the desired screen and 'sub folder' to make program management easier, in addition to the USB memory interface, menu programming and tap return function.



Shortcut keys

Network function

High capacity program data can be transferred via Ethernet at high speed. The simple production monitoring function is also available allowing you to monitor the machine's status.

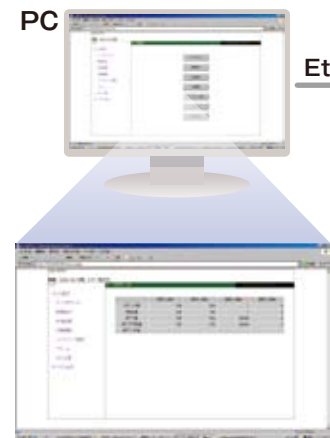


(Production monitor screen)

Ethernet




Machining support functions

Equipped with machining support functions, such as torque waveform display, high accuracy mode, and heat expansion compensation system.



Maintenance functions

Equipped with motor insulation resistance measurement, operation log, and maintenance notice function.




System capacity

Standard equipped with PLC. Input and output points can be extended to up to 1024 points each (Optional).



Reliability ~ Center trough structure ~

Considering chips generated by turning, a center trough structure is used so that chips are caught directly below the turning spindle table to improve discharging efficiency.

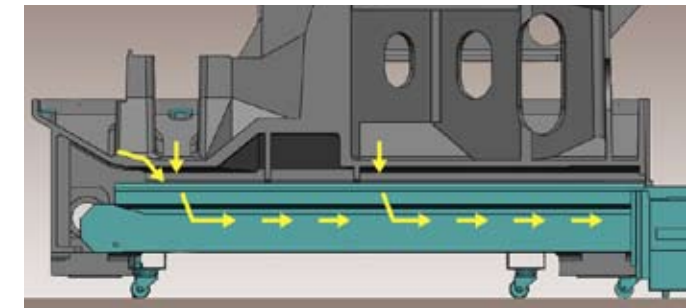

Chips are reliably discharged via the tilted base (Max. 30°).

● **Chip conveyor (optional)**



A two-step structure (hinged plate and scrapper) is used, enabling discharge of chips in a variety of sizes and shapes.

● **Tool washing (optional)**



Powerful spray removes chips stuck to the holder and double plunger.

● **Chip shower (optional)**




Enhances the effect of chip discharge by orienting the nozzles as desired from the upper section of the machine.

Environmental performance ~ Low power consumption ~

Low power consumption is achieved by using a high-efficiency spindle motor and energy saving pump, and providing a power regeneration system and energy-saving functions.

■ **Power consumption per workpiece**

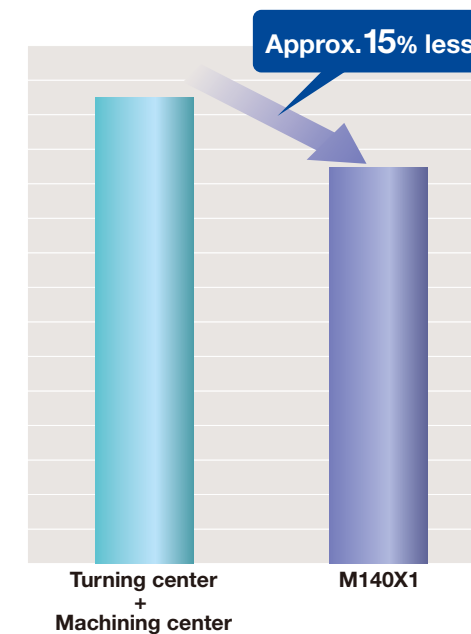

* Comparison of calculation based on the time taken to produce one alternator



LED type work light (Optional)



Energy saving pump

An earth-friendly machine equipped with a variety of energy-saving functions

- Automatic coolant off..... Turns off the coolant pump when the preset time elapses.
- Standby mode..... Turns off the servomotor when the machine is not operated for the preset time.
- Automatic work light off..... Turns off the work light when the preset time elapses.
- Automatic power off..... Turns off the power at the preset time.



Coolant Through Spindle (CTS)
1.5 MPa CTS used for BT spindle.
* Please consult Brother for use of 3 MPa CTS.



Manual pulse generator
Manual pulse generator with a cable makes operation through the maintenance window easier.
* A-axis cannot be used.



Automatic grease lubricator
Regularly greases all greasing points on the three axes.
* Manual greasing applies to the standard specification model.



LED type work light (1 or 2 lamps)
LED lamps are used to extend lamp life and save energy.



Tool washing (air-assisted type)
High discharge pressure and flow rate efficiently remove chips attached to the holder. Equipped with a filter clog warning function.



Tool breakage detector (touch type)
A touch switch type tool breakage detector is used.



Indicator light (1, 2, or 3 lamps)
LED lamps are used. There are no bulbs to burn out, making it completely maintenance free.



Side cover (transparent board type)
External light is drawn in to make the inside of the machine brighter and improve visibility.



Automatic door (motor-driven)
A motor-driven door is used, achieving smooth operation.

Outline Drawing


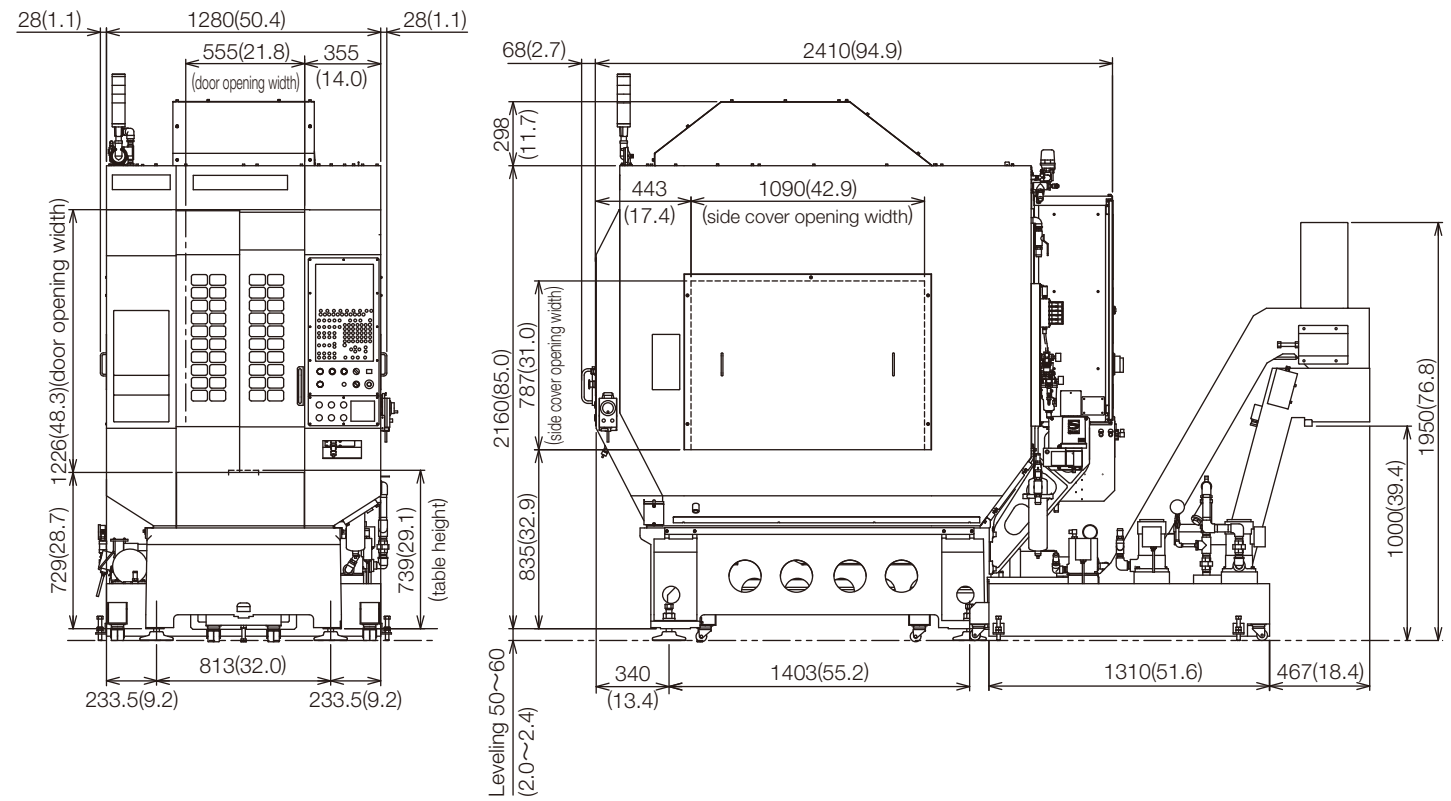


Table details

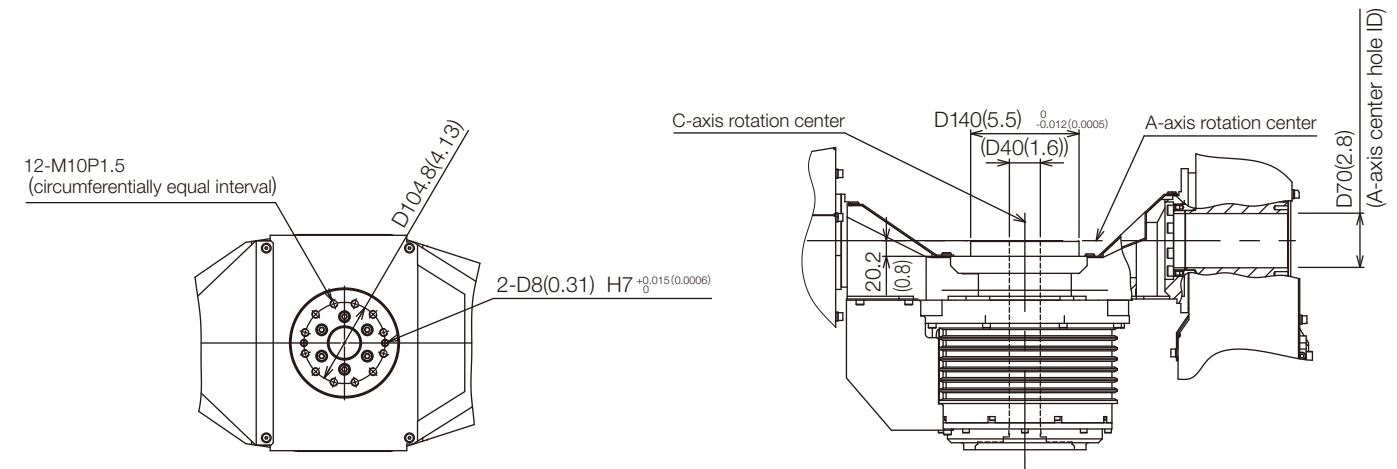

Optional Specifications

- Coolant unit
 - ① Two-step chip conveyor
- Coolant Through Spindle (CTS)
- Tool washing (air-assisted type)
- Tool breakage detector (touch type)
- Chip shower
- Cleaning gun
- Jig shower valve unit
- Automatic grease lubricator
- LED type work light (1 or 2 lamps)
- Indicator light (1, 2, or 3 lamps)
- Automatic door (motor-driven)
- Specified color
- Manual pulse generator
- Spindle override
- Grip cover
- Side cover (transparent board type)
- Side door (with transparent window, right side only)
- Switch panel (6 holes, 10 holes)
- RS232C (25 pin) for control box
- Memory expansion (approx. 500 Mbytes)
- High accuracy mode B II (look-ahead 200 blocks, smooth path offset)
- Expansion I/O board (EXIO board)
 - ① EXIO board assembly
 - ② Additional EXIO board assembly
- Interrupt type macro
- Fieldbus
 - ① CC-Link (remote device station)
 - ② PROFIBUS DP (slave)
 - ③ DeviceNet (slave)
- PLC programming software (for Windows®XP, Vista, and 7)

Windows® is a trademark or registered trademark of Microsoft Corporation in the United States and/or other countries.
* Please contact your Brother dealer for details.

mm(inch)

Secure 700 mm(27.6 inch) between machines as maintenance space.